




SB 22200 Series

Single Row-Sealed Spherical Roller Bearing

- Single row design offering increased load capacity
- Sealed to keep contamination out and lubricant in
- Dimensionally interchangeable with double row unsealed designs
- W33 Oil Hole & groove in OD

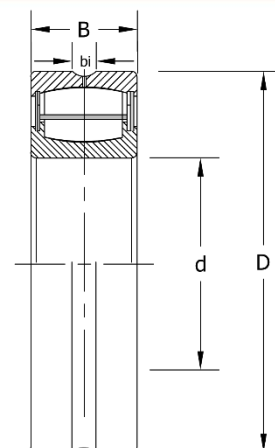

Bearing No.	Boundary Dimensions (mm)			rsmin (in)	Load Ratings		Limiting Speeds (r/min)	Weight (lbs)
	Straight Bore	d	D		B	Dynamic (Cr)	Static (Cor)	
SB22205/C3W33SS	25	52	18	.039	10340	9820	8550	.40
SB22206/C3W33SS	30	62	20	.039	11555	10970	7695	.64
SB22207/C3W33SS	35	72	23	.039	15197	14450	6460	.95
SB22208/C3W33SS	40	80	23	.039	16883	16000	5700	1.20
SB22209/C3W33SS	45	85	23	.039	17444	17095	5320	1.30
SB22210/C3W33SS	50	90	23	.039	18839	18450	4988	1.40
SB22211/C3W33SS	55	100	25	.059	22929	22691	4418	1.90
SB22212/C3W33SS	60	110	28	.059	27876	28999	3990	2.60
SB22213/C3W33SS	65	120	31	.059	34790	36192	3610	3.40
SB22214/C3W33SS	70	125	31	.059	35182	36800	3468	3.60
SB22215/C3W33SS	75	130	31	.059	36848	39000	3325	3.90
SB22216/C3W33SS	80	140	33	.079	41552	45707	3088	4.60
SB22217/C3W33SS	85	150	36	.079	49882	54800	2850	5.90
SB22218/C3W33SS	90	160	40	.079	58016	64000	2660	7.50
SB22219/C3W33SS	95	170	43	.079	69482	78100	2518	9.20
SB22220/C3W33SS	100	180	46	.079	76146	87400	2375	11.10
SB22222/C3W33SS	110	200	53	.079	98000	116600	2090	15.90
SB22224/C3W33SS	120	215	58	.079	113303	140606	1948	19.80

Tapered Bore configurations (K Suffix) are also available subject to production lead times and minimum quantities

Northeast Hauppauge, NY 1 (800) 645-5088	Southeast Atlanta, GA 1 (800) 247-9920	Midwest Chicago, IL 1 (800) 325-9696	Midwest Columbus, OH 1 (888) 700-9144	Southwest Houston, TX 1 (800) 233-5567	Southwest Dallas, TX 1 (800) 500-1015	West Coast Los Angeles, CA 1 (800) 722-0655
---	---	---	--	---	--	--