


Product Highlights

COM Series

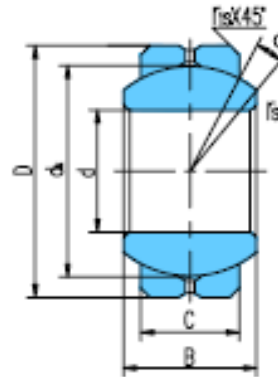

Specifications

Sliding Surface: Steel on Steel – Chrome Plated Ball

Relubricable through annular grooves & oil holes in inner ring

Part #	Ref #	Dimensions								Load Ratings kN		Wgt Lbs
		d	D	B	C	dk	rs	r1s	a	Dynamic	Static	
COM 4	GEFZ6S	.250	.6562	.343	.250	.500	.012	.022	13.5	4.4	22	.022
COM 6	GEFZ9S	.3125	.8125	.406	.312	.656	.012	.032	10	7.4	37	.037
COM 7	GEFZ11S	.4375	.9062	.437	.343	.687	.012	.032	8	8.4	42	.046
COM 8	GEFZ12S	.500	1.000	.500	.390	.813	.012	.032	9.5	12	58	.064
COM 10	GEFZ15S	.625	1.1875	.625	.500	1.00	.012	.032	9.5	19	94	.11
COM 12	GEFZ19S	.750	1.4375	.750	.593	1.187	.012	.044	9	28	141	.20
COM 14	GEFZ22S	.875	1.5625	.703	.875	1.312	.012	.044	9.5	37	186	.26
COM 16	GEFZ25S	1.00	1.750	1.00	.797	1.500	.012	.044	10	49	245	.38

Also available: Maintenance Free – PTFE Lined – COM..T
: Stainless Steel - SSCOM

Common Interchanges (1/2" Bore) : COM-8 CRS 8